

Aluminium Venetian Blinds

This document has been produced by the British Blind and Shutter Association (BBSA) to highlight the key characteristics of aluminium venetian blinds to help you make an informed choice when buying your blind.

The product characteristics detailed below represent the state of the art and any relevant standard.

Colours/Finishes

Aluminium venetian blinds are available in an extensive range of colours and finishes.

For some slat colours the head and bottom rail (which are made of steel for strength) may not be identical colour match to the slats.

Similarly, the operating cords, ladders and any braids may not be an identical colour match to the slats.

Although suitable for rooms with high humidity, adequate ventilation is required with no direct water contact with the blind.

Slat closure

Aluminium slats are slightly curved. This adds strength to the slat and helps achieve a better slat closure.

Light exclusion

Although aluminium venetian blinds provide a good degree of light exclusion, they are not blackout blinds and light may enter via:

- **Slats**, there will always be some light filtering through. Expect any gaps between the fully tilted slats to be greater towards the bottom of the blind.
- **Bottom rail**, this will normally be supplied to rest on the cill. This prevents the blind from swaying should a window be open and reduces the amount of light entering underneath the blind. However, the bottom rail can limit the full closure of the slats at the base of the blind allowing some additional light to filter through at this point.
- **Sides/punch holes**, a limited amount of light will also filter around the sides of the blind and through the punched cord holes in the slats.

The amount of light coming through may not be consistent over the whole blind.

Fitting in a bay window

When fitted in a bay window, there will be some gaps where the neighbouring blind headrails meet each other. The amount of any gap will depend on several factors including the shape of the bay, the style of the window and the specification of the blind system. The gap will be more noticeable when the slats are closed.

Similarly, at the edge of the bay there may be light gaps/potential loss of privacy depending on the angle of the bay and adjoining walls.

Finished drop

Due to the set distances of the slat support rungs, achieving the exact size ordered may not be possible. In order to prevent the blind from being too short, an extra slat may be added to ensure a suitable drop is reached. This will result in the blind having a slightly longer drop than originally ordered.

Slat alignment

The alignment of slats can vary due to tolerances in the ladder support rungs and so absolute alignment between adjacent blinds cannot be guaranteed.

Fitting inside the reveal (window recess)

To allow for operating clearance, the width of the blind must be narrower than the width of the reveal. If there are any obstructions in the reveal, for example tiles at the base or a dado rail, the blind will need to be made to accommodate the narrowest width.

Reveal (recess) not dimensionally consistent

An aluminium venetian blind is made square however in reality reveals are often not. The head of the window or cill can be uneven and the distances between the side walls throughout often vary.

The distance from the edge of the reveal to the window may

Aluminium Venetian Blinds

also vary, so blinds will either be fitted to run parallel to the window or to the edge of the reveal.

Motorisation

There is a wide range of motorised solutions available for your comfort and convenience and each system will have its own characteristics. Some points to consider are:

- **Speed and alignment** - due to mechanical and electrical tolerances, blinds in the same installation may not travel at the same speed and may not line up if stopped during the travel of the blinds.
- **Noise** - being operated by a motor, some noise will be emitted. Quiet motors may be an option.
- **Wiring** - some surface wiring may be required. Where 240V mains power is involved, a competent person will be required to provide a power feed unless the blinds can be powered from a plug inserted into an existing socket.
- **Motor protection** - most motors are fitted with a thermal cut-out to protect them from getting too hot (usually from over-use). When cooled sufficiently, the motor will start working again.

Child safety

All blinds with cords or chains which could pose a risk of strangulation to young children **must** be fitted with safety devices. The device required will be determined by the blind type being used.

For further information on window blind safety visit: www.makeitsafe.org.uk



Visual Product Inspection


When checking the visual characteristics of any blind/shutter, the following should be observed:

Viewing distance and lighting

3m for exterior products in diffuse daylight;
2m for interior products with lighting suitable for normal room use.

Viewing angle

Perpendicular to the surface being checked.

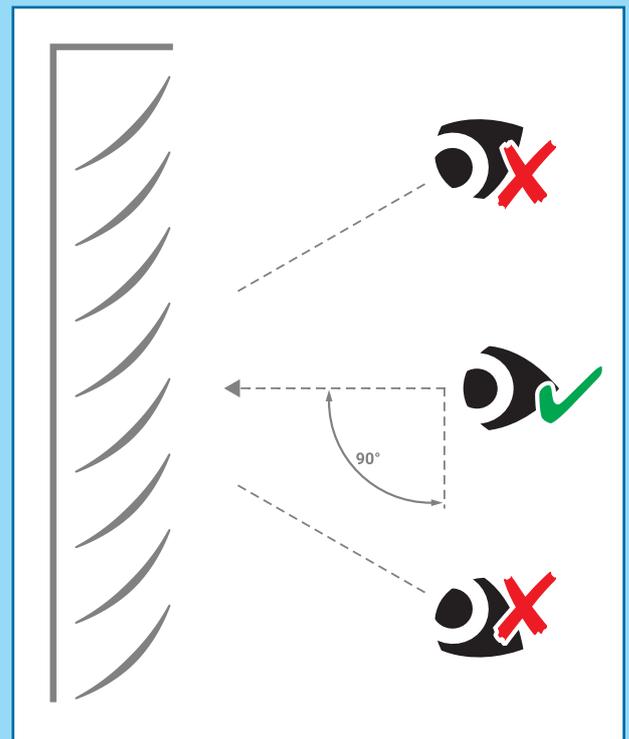

Viewing aids

Naked eye (and any corrective glasses if applicable).

Always ensure you read and carefully follow the operating and maintenance instructions.